


Product data sheet

Hummel connectoren
Inserts 4+3+PE



Sockets

7.001.943.108
<https://www.ac-solutions.be/nl/product/7001943108>

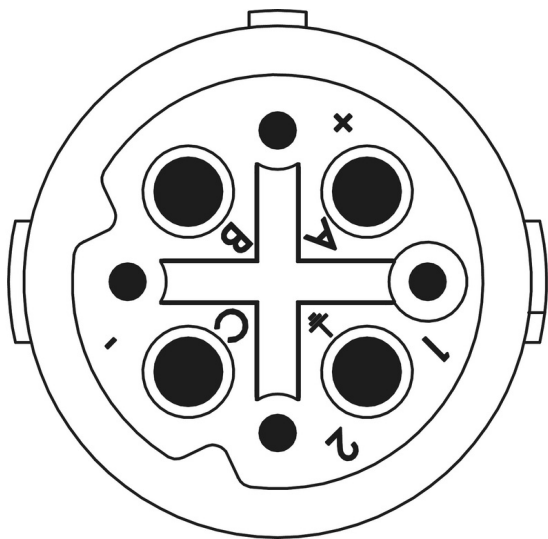

Specificaties

General Characteristics

Size	M16
Number of contacts	4+3+PE
Gender	Female
Upper temperature	+125 °C
Lower temperature	-40 °C
Locking	Screw locking Twilock
Protection degree	IP67/IP69K
Terminal type	Dip-solder
Included contacts	dip solder length 10 mm
Contact diameter (a)	0.8 mm
Contact diameter (b)	1.6

Electrical Parameters

Nominal voltage (degree of pollution 3) (a)	160 V~
Nominal voltage (degree of pollution 3) (b)	320 V~

Product data sheet

Hummel connectoren

Inserts 4+3+PE



Test voltage (a)	1500 V~
Test voltage (b)	2500 V~
Nominal current	5 A
Nominal current (b)	16 A
Insulation resistance	> 10 ¹² ?
Max. contact resistance	3 m?

Material

Material	Thermoplastic Polyamid PA 6/Fire protection class V-0
----------	---