

## Female panel mount connector




**With single wires, 0,14mm<sup>2</sup>/0,25mm<sup>2</sup>**

UL-approval

76 0232 0011 00505 0200

<https://www.ac-solutions.be/nl/product/7602320011005050200>

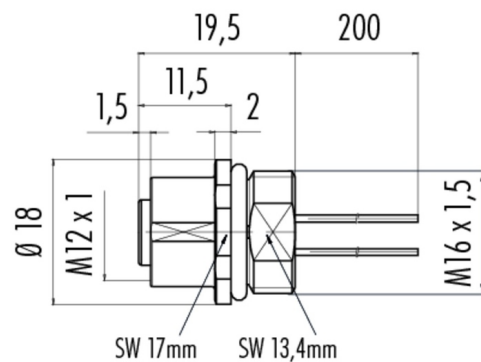

Ausführung mit Zink Druckgussgehäuse  
Version with zinc diecasted housing

## Specificaties

## General Characteristics

|                    |               |
|--------------------|---------------|
| Screw size         | M12-A         |
| Series             | Sensor        |
| Subseries          | 713-763       |
| Gender             | Female        |
| Number of contacts | 5             |
| Contact terminal   | Single wires  |
| Color              | Red           |
| Upper temperature  | +85 °C        |
| Lower temperature  | -40 °C        |
| Protection degree  | IP67          |
| Locking system     | Screw (M12-A) |
| Mating cycles      | >50           |
| Connector Diameter | 18 mm         |
| Wire-section       | 0.25 mm²      |

# Product data sheet

## Binder connectoren

### Female panel mount connector



|               |           |
|---------------|-----------|
| Fixing thread | M16 x 1,5 |
|---------------|-----------|

## Electrical parameters

|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 125 V  |
| Impuls voltage          | 1500 V |
| Max. contact resistance | 3 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

## Material

|                     |                               |
|---------------------|-------------------------------|
| Material group      | II                            |
| Material of insert  | PA                            |
| Material of housing | Zinc diecasting nickel plated |
| Material of contact | CuSn (Bronze)                 |
| Plating             | Au (Gold)                     |