

Product data sheet

Binder connectoren

Female panel mount connector




Square flange

UL-approval

76 0940 0115 00044 0200

<https://www.ac-solutions.be/nl/product/7609400115000440200>

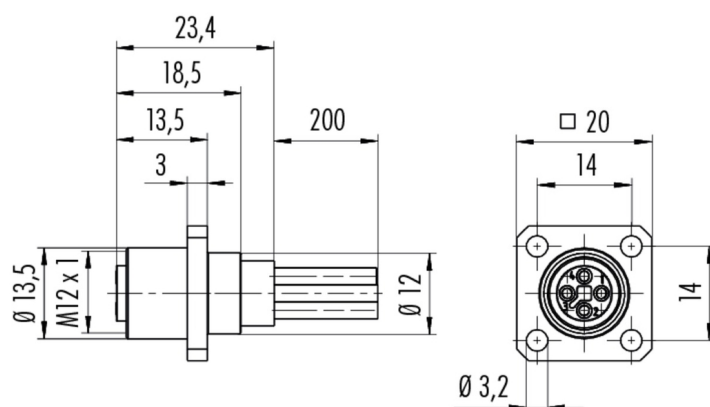

Specificaties

General Characteristics

Screw size	M12-T
Series	Power
Subseries	813
Gender	Female
Number of contacts	4
Contact terminal	Single wires
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-T)
Connector Diameter	22.2 mm

Electrical parameters

Nominal current	12 A
-----------------	------

Product data sheet

Binder connectoren

Female panel mount connector



Nominal voltage	63 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	III

Material

Material group	III
Material of insert	PA
Material of contact	CuSn (Bronze)
Plating	Au (Gold)