

Product data sheet

Binder connectoren

Male panel mount connector




Front fastened, with single wires

AWG 24, M16 x 1,5

76 4731 3011 00004 0200

<https://www.ac-solutions.be/nl/product/7647313011000040200>

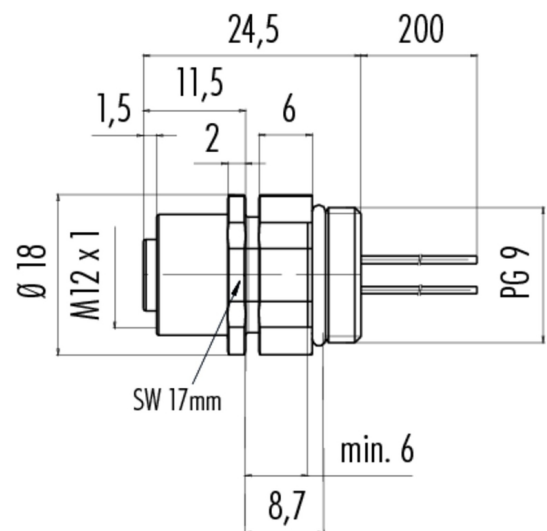

Specificaties

General Characteristics

Screw size	M12-A
Series	Sensor
Subseries	763
Gender	Male
Number of contacts	4
Contact terminal	Strands
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-A)
Mating cycles	>100
Connector Diameter	21 mm
Wire gauge	24 AWG
Wire-section	0.25 mm ²

Product data sheet

Binder connectoren

Male panel mount connector



Fixing thread	M16 x 1,5
---------------	-----------

Electrical parameters

Nominal current	1.5 A
Nominal voltage	250 V
Impuls voltage	2500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA
Material of housing	PA
Material of contact	CuZn (Brass)
Plating	Au (Gold)