

Product data sheet

Binder connectoren


Female cable connector





Moulded, stainless steel ring nut

77 3730 0000 50005 0200

<https://www.ac-solutions.be/nl/product/7737300000500050200>

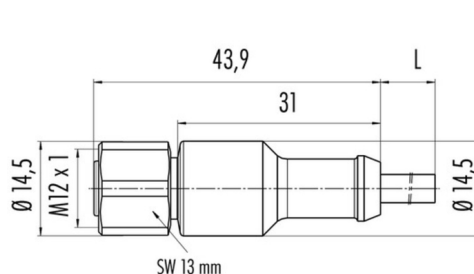

VA



Specificaties

General Characteristics

Screw size	M12-A
Series	Sensor
Subseries	763
Gender	Female
Number of contacts	5
Contact terminal	Crimp, moulded
Upper temperature	+85 °C
Lower temperature	-25 °C
Protection degree	IP68
Locking system	Screw (M12-A)
Mating cycles	>100
Connector Diameter	14.5 mm
Cable Length	2 m
Cable diameter	5 mm
Cable	5 x 0,25 PUR

Product data sheet

Binder connectoren

Female cable connector



Wire-section	0.25 mm ²
--------------	----------------------

Electrical parameters

Nominal current	4 A
Nominal voltage	125 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Jacket material	PUR
Material group	II
Material of insert	PUR
Material of housing	PUR
Material of contact	CuSn (Bronze)
Plating	Au (Gold)
Insulation wire	PVC