

# Product data sheet

## Binder connectoren

Connecting cable, male cable connector M12x1 & female cable connector M12x1




## overmoulded, stainless steel

PVC Cable, UL approval

77 3730 3729 20404 0200

<https://www.ac-solutions.be/nl/product/7737303729204040200>

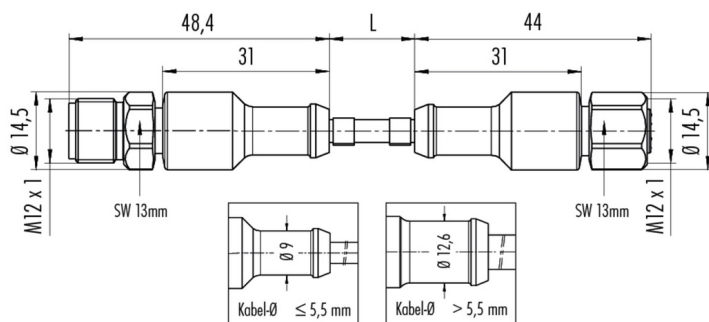

## Specificaties

### General Characteristics

|                    |                             |
|--------------------|-----------------------------|
| Screw size         | M12-A                       |
| Series             | Sensor                      |
| Subseries          | 763                         |
| Gender             | Male & Female               |
| Number of contacts | 4                           |
| Contact terminal   | Crimp, overmoulded on cable |
| Color              | Grey                        |
| Upper temperature  | +105 °C                     |
| Lower temperature  | -40 °C                      |
| Protection degree  | IP69K                       |
| Locking system     | Screw (M12-A)               |
| Mating cycles      | >100                        |
| Connector Diameter | 14.5 mm                     |
| Cable Length       | 2 m                         |

# Product data sheet

## Binder connectoren

Connecting cable, male cable connector M12x1 & female cable connector M12x1



|                       |                      |
|-----------------------|----------------------|
| Cable sheath          | 4.8 mm               |
| Wire gauge            | 22 AWG               |
| Wire-section          | 0.34 mm <sup>2</sup> |
| Radius cable fixed    | Min. 5xD             |
| Radius cable movable  | min. 10xD            |
| Single lead structure | 32x0,1               |

## Electrical parameters

|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 250 V  |
| Impuls voltage          | 2500 V |
| Max. contact resistance | 3 m?   |
| Conductor resistance    | 79     |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

## Material

|                        |                             |
|------------------------|-----------------------------|
| Material group         | II                          |
| Material of insert     | PP                          |
| Material of housing    | PP                          |
| Material of contact    | Cuzn (Brass), Cusn (Bronze) |
| Plating                | Au (Gold)                   |
| Housing of cable       | PVC                         |
| Insulation single lead | PVC                         |