

Product data sheet


Binder connectoren

Connecting cable, Male angled connector M12x1 - Female angled connector M12x1



77 3734 3727 40912 0200

<https://www.ac-solutions.be/nl/product/7737343727409120200>

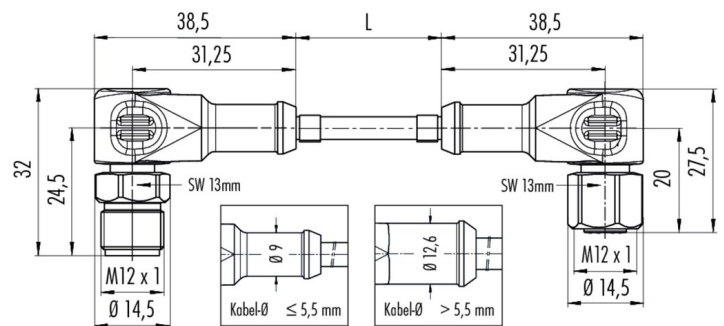

Specificaties

General Characteristics

Screw size	M12-A
Series	Sensor
Subseries	763
Gender	Male & Female
Number of contacts	12
Contact terminal	moulded on cable
Color	Grey
Upper temperature	+105 °C
Lower temperature	-40 °C
Protection degree	IP69K/IP67
Locking system	Screw (M12-A)
Mating cycles	>100
Connector Diameter	14.5 mm
Cable Length	2 m
Cable diameter	6,6 mm
Wire gauge	22-28 AWG
Wire-section	0,08 - 0,34 mm ²

Product data sheet

Binder connectoren

Connecting cable, Male angled connector M12x1 - Female angled connector M12x1



Radius cable fixed	Min. 5xD
Radius cable movable	min. 10xD
Single lead structure	32x0,1

Electrical parameters

Nominal current	1.5 A
Nominal voltage	30 V
Impuls voltage	800 V
Conductor resistance	75
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PP
Material of housing	PP
Material of contact	Cuzn (Brass), Cusn (Bronze)
Plating	Au (Gold)
Insulation single lead	PVC