

Product data sheet

Hummel connectoren

Panel Connector with knurled Nut




4+3+PE, insert for sockets, power

Front Mounting, housing included

7.744.043.000

<https://www.ac-solutions.be/nl/product/7744043000>

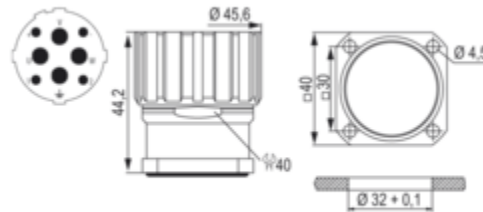

Specificaties

General Characteristics

Number of contacts	8 mixed layout
Gender of required insert	Female
Connector diameter	46 mm
Upper temperature	125 °C
Lower temperature	-40 °C
Connector locking system	Screw
Protection degree	IP67/IP69K
Mating cycles	>500
Terminal type	Crimp
Holes	4 holes Ø 4,5 mm
Wire section (a)	1-4 mm
Wire section (b)	1,5-16 mm
Crimp contacts (to be ordered separately)	4x2mm & 4x3,6mm
Contact diameter (a)	2

Product data sheet

Hummel connectoren

Panel Connector with knurled Nut



Contact diameter (b)	3.6
----------------------	-----

Electrical parameters

Nominal current (a)	28 A
Nominal current (b)	55 A
Insulation resistance	$> 10^{13}$
Nominal voltage (degree of pollution 3) (a)	300 V
Nominal voltage (degree of pollution 3) (b)	600 V
Test voltage (a)	2500 V
Test voltage (b)	4000 V
Max. contact resistance (a)	3 m Ω
Max. contact resistance (b)	1 m Ω

Material

Housing material	Copper-Zinc alloy/ Die casting
Housing plating	Nickel plated