

Product data sheet


Binder connectoren

Male angled connector



79 0233 20 04

<https://www.ac-solutions.be/nl/product/7902332004>

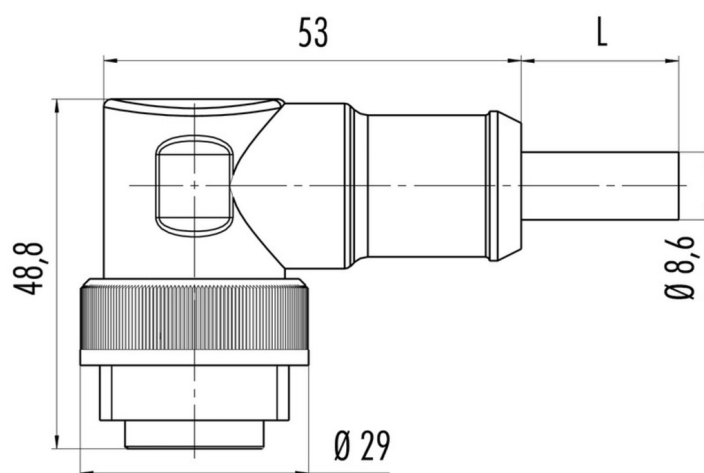

Specificaties

General Characteristics

Screw size	RD24
Series	Power
Subseries	692-693
Gender	Male
Number of contacts	4
Contact terminal	Crimp, moulded
Upper temperature	+80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking system	Screw (RD24)
Mating cycles	>500
Connector Diameter	29 mm
Cable Length	2 m
Cable diameter	8,6 mm
Wire-section	4 x 1,5 mm ²

Electrical parameters

Nominal current	16 A
-----------------	------

Product data sheet

Binder connectoren

Male angled connector



Nominal voltage	400 V
Impuls voltage	6000 V
Max. contact resistance	5 m?
Pollution degree	3
Overvoltage categorie	III

Material

Material group	III
Material of insert	PA 12
Material of housing	PUR
Material of contact	CuZn (Brass)
Plating	Ag (Silver)