

Product data sheet

Binder connectoren


Twin distributor



Male connector M8x1 - 2 female connectors M8x1

79 5232 70 04

<https://www.ac-solutions.be/nl/product/7952327004>

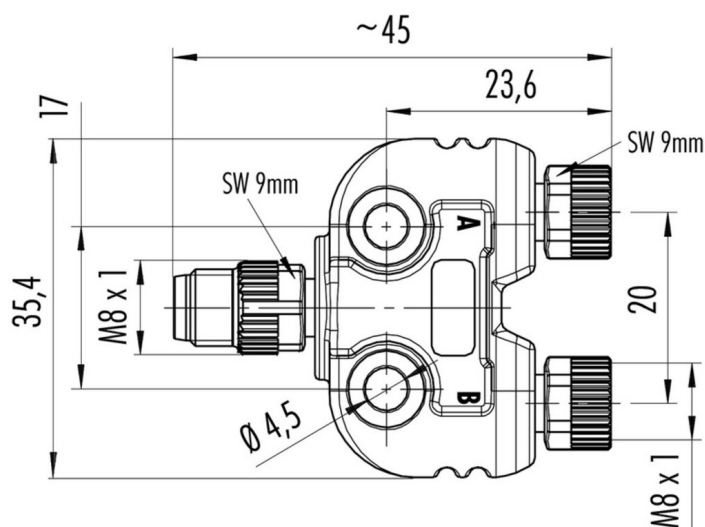

Specificaties

General Characteristics

Screw size	M8
Series	Sensor
Subseries	765
Gender	Male & Female
Number of contacts	4/3
Upper temperature	+85 °C
Lower temperature	-25 °C
Protection degree	IP68
Locking system	Screw
Mating cycles	>100
Connector Diameter	35.4 mm

Electrical parameters

Nominal current	4 A
Nominal voltage	60 V

Product data sheet

Binder connectoren

Twin distributor



Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PUR
Material of housing	PUR
Material of contact	Pin CuZn (Brass), Socket (Bronze)
Plating	Au (Gold)