


Female panel mount connector

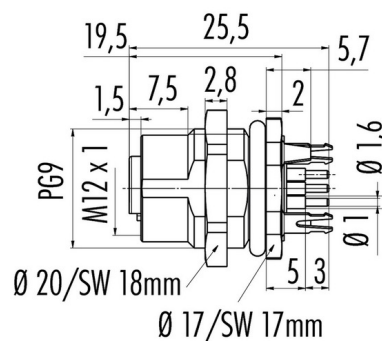

Sechskantmutter lose beigelegt
Hexagon nut enclosed loose

Leiterplattendicke: 1,6 mm
Thickness of PCB: 1,6 mm

Product data sheet

Binder connectoren

Female panel mount connector



Nominal current	4 A
Nominal voltage	125 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA
Material of housing	Brass nickel plated
Material of contact	CuSn (Bronze)
Plating	Au (Gold)