

Product data sheet

Binder connectoren


Female angled panel mount connector



Front fastened, dip solder, with shielding sheet

86 6618 1121 00006

<https://www.ac-solutions.be/nl/product/866618112100006>

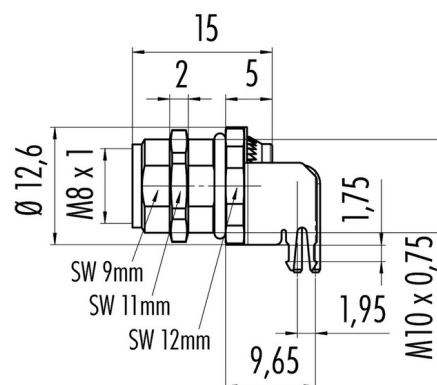

Leiterplattendicke: 1,6 mm
Thickness of PCB: 1,6 mm

Specificaties

General Characteristics

Screw size	M8
Series	Sensor
Subseries	768-718
Gender	Female
Number of contacts	6
Contact terminal	Dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M8)
Mating cycles	>100
Connector Diameter	12.6 mm

Electrical parameters

Nominal current	1.5 A
-----------------	-------

Product data sheet

Binder connectoren

Female angled panel mount connector



Nominal voltage	30 V
Impuls voltage	800 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA (UL 94 HB)
Material of housing	Zinc diecasting nickel plated
Material of contact	CuSn (Bronze)
Plating	Au (Gold)