

Product data sheet

Binder connectoren


Male receptacle



Short version, without LED, with dip solder contacts

86 6819 0000 00704

<https://www.ac-solutions.be/nl/product/866819000000704>

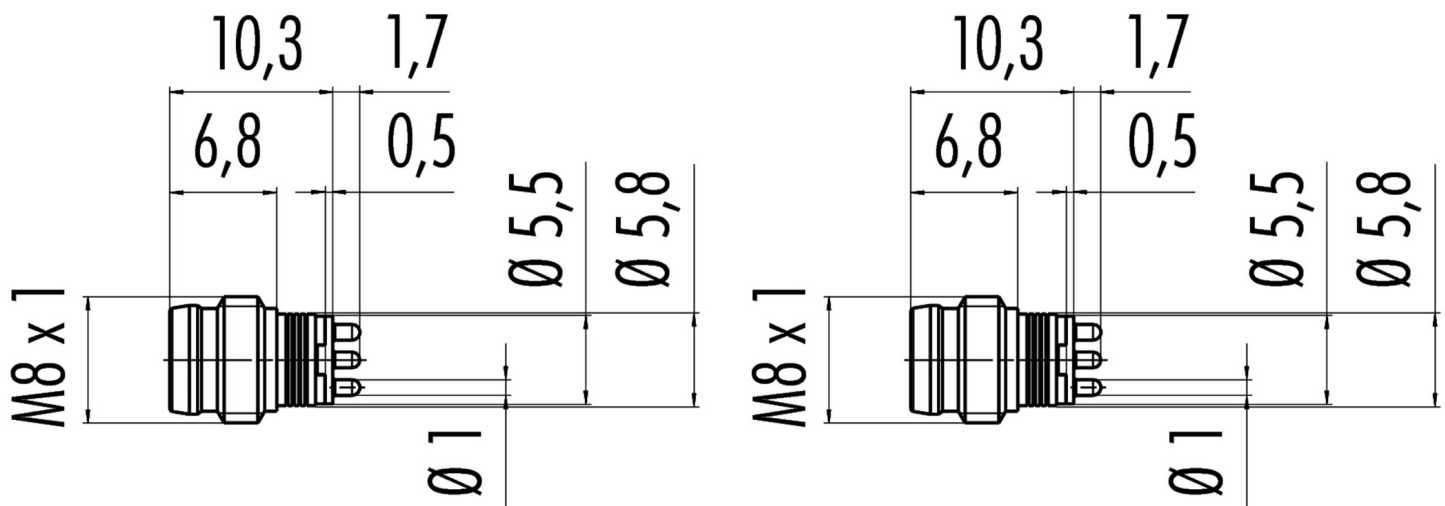

Specificaties

General Characteristics

Screw size	M8
Series	Sensor
Subseries	768-718
Gender	Male
Number of contacts	4
Contact terminal	Dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M8)
Mating cycles	>100
Connector Diameter	5.8 mm
Wire-section	0.25 mm²

Electrical parameters

Product data sheet

Binder connectoren

Male receptacle



Nominal current	4 A
Nominal voltage	30 V
Impuls voltage	800 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA (UL 94 HB)
Material of housing	CuZn (Brass nickel plated)
Material of contact	CuZn (Brass)
Plating	Au (Gold)