

# Product data sheet

## Binder connectoren


### Male angled connector



## 360° EMI protected, shieldable

99 0425 75 08

<https://www.ac-solutions.be/nl/product/9904257508>

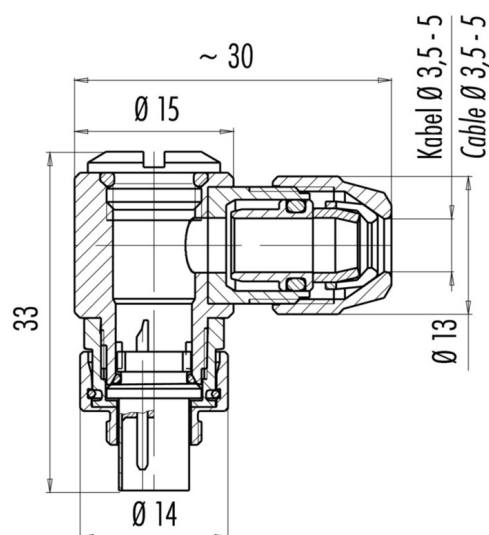

## Specificaties

### General Characteristics

|                    |                      |
|--------------------|----------------------|
| Screw size         | M9                   |
| Series             | Subminiature         |
| Subseries          | 712                  |
| Gender             | Male                 |
| Number of contacts | 8                    |
| Contact terminal   | Solder               |
| Upper temperature  | +85 °C               |
| Lower temperature  | -40 °C               |
| Protection degree  | IP67                 |
| Locking system     | Screw (M9)           |
| Mating cycles      | >500                 |
| Connector Diameter | 14 mm                |
| Cable outlet       | 3,5-5 mm             |
| Wire-section       | 0.14 mm <sup>2</sup> |

### Electrical parameters

# Product data sheet

## Binder connectoren

### Male angled connector



|                         |        |
|-------------------------|--------|
| Nominal current         | 1 A    |
| Nominal voltage         | 125 V  |
| Impuls voltage          | 1500 V |
| Max. contact resistance | 3 m?   |
| Pollution degree        | 1      |
| Overvoltage categorie   | II     |

## Material

|                     |                                             |
|---------------------|---------------------------------------------|
| Material group      | III                                         |
| Material of insert  | PBT (UL 94 V-0)                             |
| Material of housing | PA (UL 94 VH-B), CuZn (Brass nickel plated) |
| Material of contact | CuZn (Brass)                                |
| Plating             | Au (Gold)                                   |