

# Product data sheet

## Binder connectoren

### Female cable connector




## Metal locking system, screw clamp connection, solder termination on 12 pol

UL-approval

99 0430 07 04

<https://www.ac-solutions.be/nl/product/9904300704>

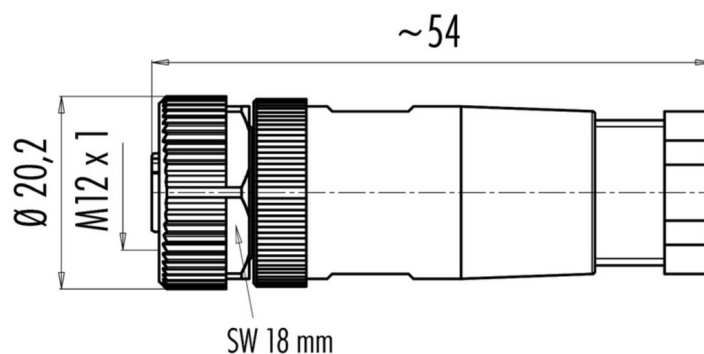

## Specificaties

### General Characteristics

|                    |                      |
|--------------------|----------------------|
| Screw size         | M12-A                |
| Series             | Sensor               |
| Subseries          | 713                  |
| Gender             | Female               |
| Number of contacts | 3                    |
| Contact terminal   | Screw                |
| Upper temperature  | +85 °C               |
| Lower temperature  | -40 °C               |
| Protection degree  | IP67                 |
| Locking system     | Screw (M12-A)        |
| Mating cycles      | >50                  |
| Connector Diameter | 20.2 mm              |
| Cable outlet       | 4-6 mm               |
| Wire-section       | 0.75 mm <sup>2</sup> |

# Product data sheet

## Binder connectoren

### Female cable connector



## Electrical parameters

|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 250 V  |
| Impuls voltage          | 2500 V |
| Max. contact resistance | 8 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

## Material

|                     |                   |
|---------------------|-------------------|
| Material group      | II                |
| Material of insert  | PA                |
| Material of housing | PA                |
| Material of contact | CuZn (Brass)      |
| Plating             | CuSnZn (Optalloy) |