

Product data sheet

Binder connectoren

Female cable connector




Metal locking system, screw clamp connection, solder termination on 12 pol

UL-approval

99 0492 12 12

<https://www.ac-solutions.be/nl/product/9904921212>

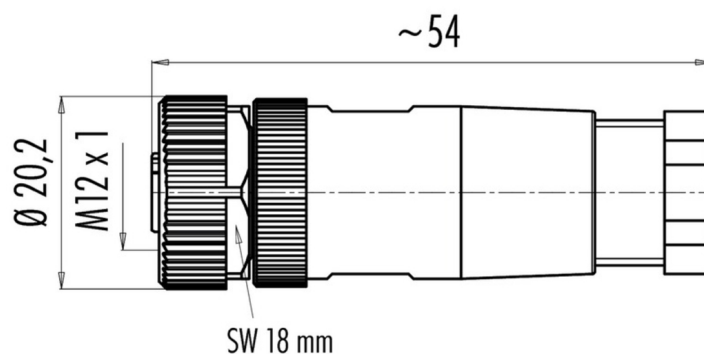

Specificaties

General Characteristics

Screw size	M12-A
Series	Sensor
Subseries	713
Gender	Female
Number of contacts	12
Contact terminal	Solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-A)
Mating cycles	>50
Connector Diameter	20.2 mm
Cable outlet	6-8 mm
Wire-section	0.25 mm ²

Product data sheet

Binder connectoren

Female cable connector



Electrical parameters

Nominal current	1 A
Nominal voltage	30 V
Impuls voltage	500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA
Material of housing	PA
Material of contact	CuSn (Bronze)
Plating	Au (Gold)