

Product data sheet

Binder connectoren


Male panel mount connector



Power, T-coding, M20 x 1,5

99 0633 500 04

<https://www.ac-solutions.be/nl/product/99063350004>

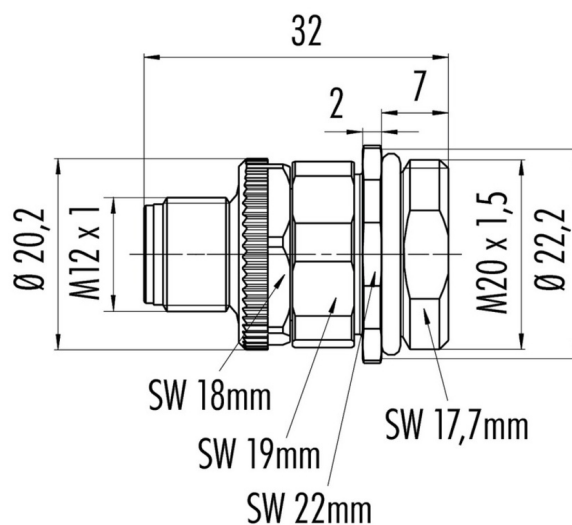

Specificaties

General Characteristics

Screw size	M12-T
Series	Power
Subseries	813
Gender	Male
Number of contacts	4
Contact terminal	Screw clamp
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Screw (M12-T)
Mating cycles	>100
Connector Diameter	20.2 mm
Wire-section	1.5 mm ²
Fixing thread	M20 x 1,5

Electrical parameters

Product data sheet

Binder connectoren

Male panel mount connector



Nominal current	12 A
Nominal voltage	60 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	3
Overvoltage categorie	III

Material

Material group	III
Material of insert	PA
Material of housing	Zinc diecasting nickel plated
Material of contact	CuZn (Brass)
Plating	Au (Gold)