

# Product data sheet

## Binder connectoren


### Female cable connector



## Shieldable, with wire clamp connection, version with shielding ring

99 1536 910 05

<https://www.ac-solutions.be/nl/product/99153691005>

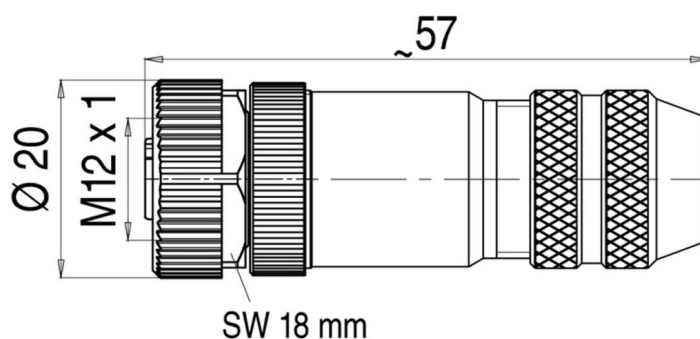

## Specificaties

### General Characteristics

|                    |                     |
|--------------------|---------------------|
| Screw size         | M12-B               |
| Series             | Sensor              |
| Subseries          | 715                 |
| Gender             | Female              |
| Number of contacts | 5                   |
| Contact terminal   | Wire clamp          |
| Upper temperature  | +85 °C              |
| Lower temperature  | -40 °C              |
| Protection degree  | IP67                |
| Locking system     | Screw (M12-B)       |
| Mating cycles      | >100                |
| Connector Diameter | 20 mm               |
| Cable outlet       | 6,5-8,5 mm          |
| Wire-section       | 0.5 mm <sup>2</sup> |

### Electrical parameters

# Product data sheet

## Binder connectoren

### Female cable connector



|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 125 V  |
| Impuls voltage          | 1500 V |
| Max. contact resistance | 3 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

## Material

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| Material group      | III                                                   |
| Material of insert  | PA                                                    |
| Material of housing | Zinc diecasting nickel plated, stainless steel 1.4404 |
| Material of contact | CuZn (Brass)                                          |
| Plating             | Au (Gold)                                             |