

# Product data sheet

## Binder connectoren

### Female receptacle




## for PCB assembly, angled

With shielding sheet, UL approval

99 3432 601 04

<https://www.ac-solutions.be/nl/product/99343260104>

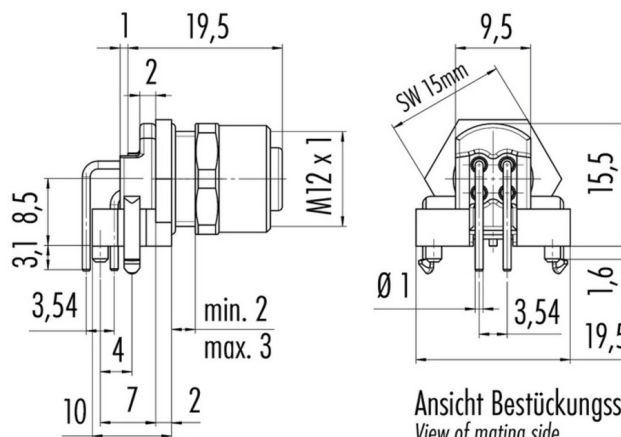

Ansicht Bestückungsseite  
View of mating side

Leiterplattendicke: 1,6 mm  
Thickness of PCB: 1,6 mm

## Specificaties

### General Characteristics

|                    |               |
|--------------------|---------------|
| Screw size         | M12-A         |
| Series             | Sensor        |
| Subseries          | 713-763       |
| Gender             | Female        |
| Number of contacts | 4             |
| Contact terminal   | Dip solder    |
| Upper temperature  | +85 °C        |
| Lower temperature  | -40 °C        |
| Protection degree  | IP68          |
| Locking system     | Screw (M12-A) |
| Mating cycles      | >100          |
| Connector Diameter | 19.5 mm       |

## Electrical parameters

# Product data sheet

## Binder connectoren

### Female receptacle



|                         |        |
|-------------------------|--------|
| Nominal current         | 4 A    |
| Nominal voltage         | 250 V  |
| Impuls voltage          | 2500 V |
| Max. contact resistance | 3 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | II     |

## Material

|                     |                            |
|---------------------|----------------------------|
| Material group      | III                        |
| Material of insert  | PA                         |
| Material of housing | CuZn (Brass nickel plated) |
| Material of contact | CuSn (Bronze)              |
| Plating             | Au (Gold)                  |