

# Product data sheet

## Binder connectoren

### Female panel mount connector




## SMT, with housing

Shieldable

99 3732 402 04

<https://www.ac-solutions.be/nl/product/99373240204>

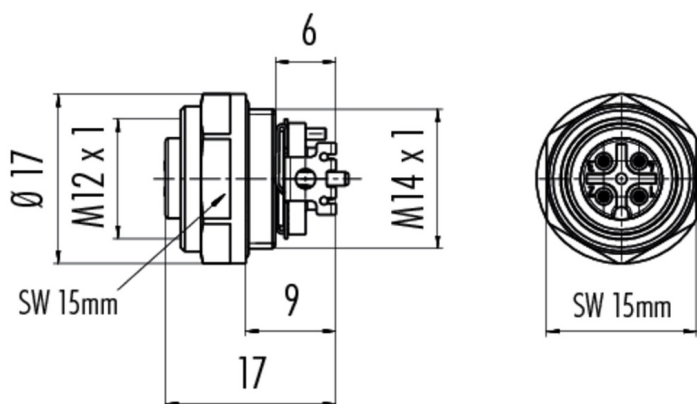

## Specificaties

### General Characteristics

|                    |               |
|--------------------|---------------|
| Screw size         | M12-D         |
| Series             | Sensor        |
| Subseries          | 825-876       |
| Gender             | Female        |
| Number of contacts | 4             |
| Contact terminal   | SMT           |
| Upper temperature  | +85 °C        |
| Lower temperature  | -40 °C        |
| Locking system     | Screw (M12-D) |
| Connector Diameter | 19 mm         |
| Mounting height    | 13 mm         |

### Electrical parameters

|                 |     |
|-----------------|-----|
| Nominal current | 4 A |
|-----------------|-----|

# Product data sheet

## Binder connectoren

### Female panel mount connector



|                 |        |
|-----------------|--------|
| Nominal voltage | 250 V  |
| Impuls voltage  | 2500 V |

## Material

|                     |               |
|---------------------|---------------|
| Material of insert  | LCP           |
| Material of contact | CuSn (Bronze) |
| Plating             | Au (Gold)     |