

# Product data sheet

## Binder connectoren


### Male cable connector



## PG9 / with VDE-, SEV-, UL-approval

99 4221 00 04

<https://www.ac-solutions.be/nl/product/9942210004>

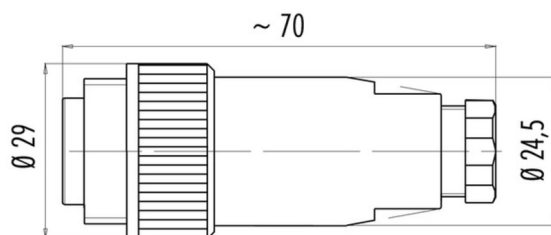

## Specificaties

### General Characteristics

|                    |                           |
|--------------------|---------------------------|
| Screw size         | RD24                      |
| Series             | Power                     |
| Subseries          | 692-693                   |
| Gender             | Male                      |
| Number of contacts | 4                         |
| Contact terminal   | Screw                     |
| Upper temperature  | +100 °C                   |
| Lower temperature  | -40 °C                    |
| Protection degree  | IP67*                     |
| Locking system     | Screw (RD24)              |
| Mating cycles      | >500                      |
| Connector Diameter | 29 mm                     |
| Cable outlet       | 6-9,5 mm                  |
| Wire-section       | 0,5 - 2,5 mm <sup>2</sup> |
| Remark*            | *IP65 for cable-Ø 6-7 mm  |

# Product data sheet

## Binder connectoren

### Male cable connector



## Electrical parameters

|                         |        |
|-------------------------|--------|
| Nominal current         | 16 A   |
| Nominal voltage         | 400 V  |
| Impuls voltage          | 6000 V |
| Max. contact resistance | 5 m?   |
| Pollution degree        | 3      |
| Overvoltage categorie   | III    |

## Material

|                     |                |
|---------------------|----------------|
| Material group      | III            |
| Material of insert  | PBT (UL94 V-0) |
| Material of housing | PBT (UL94 V-0) |
| Material of contact | CuZn (Brass)   |
| Plating             | Ag (Silver)    |