

# Product data sheet

## Binder connectoren


### Female cable connector



## Shieldable

99 4622 10 12

<https://www.ac-solutions.be/nl/product/9946221012>

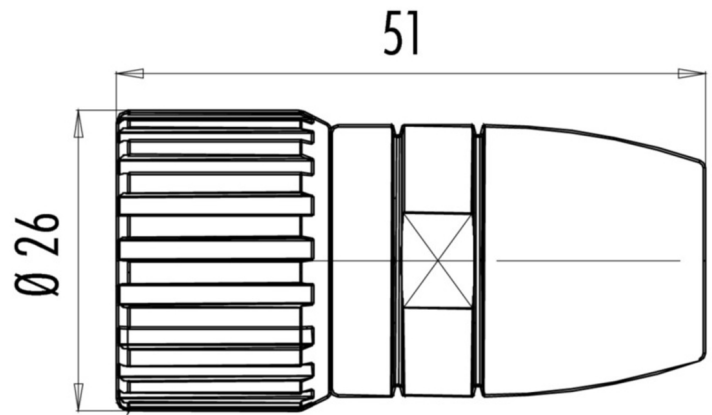

## Specificaties

### General Characteristics

|                    |                   |
|--------------------|-------------------|
| Screw size         | M23               |
| Series             | Power             |
| Subseries          | 623               |
| Gender             | Female            |
| Number of contacts | 12                |
| Contact terminal   | Solder            |
| Upper temperature  | +125 °C           |
| Lower temperature  | -20 °C            |
| Protection degree  | IP67              |
| Locking system     | Screw (M23)       |
| Mating cycles      | >50               |
| Connector Diameter | 26 mm             |
| Contact Type       | Anticlockwise     |
| Cable outlet       | 6-10 mm           |
| Wire-section       | 1 mm <sup>2</sup> |

# Product data sheet

## Binder connectoren

### Female cable connector



#### Remark\*

\*Earth sleeves with seals have to be ordered separately

## Electrical parameters

|                         |              |
|-------------------------|--------------|
| Nominal current         | 8 A          |
| Nominal voltage         | 150 V        |
| Impuls voltage          | 1500 V       |
| Max. contact resistance | 3 m $\Omega$ |
| Pollution degree        | 3            |
| Overvoltage categorie   | II           |

## Material

|                     |                             |
|---------------------|-----------------------------|
| Material group      | III                         |
| Material of insert  | PBT/PA66                    |
| Material of housing | CuZn (Brass, nickel plated) |
| Material of contact | CuSn (Bronze)               |
| Plating             | Au (Gold)                   |