

Product data sheet

Binder connectoren


Female cable connector



shielded IP67

99 4930 00 08

<https://www.ac-solutions.be/nl/product/9949300008>

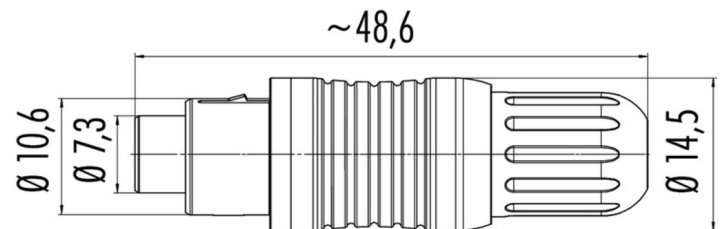

Specificaties

General Characteristics

Series	Subminiature
Subseries	430
Gender	Female
Number of contacts	8
Contact terminal	Solder
Upper temperature	+85 °C
Lower temperature	-40 °C
Protection degree	IP67
Locking system	Push-Pull
Mating cycles	>500
Connector Diameter	14.5 mm
Cable outlet	3,5-5 mm
Wire-section	0.14 mm²

Electrical parameters

Product data sheet

Binder connectoren

Female cable connector



Nominal current	1 A
Nominal voltage	125 V
Impuls voltage	1500 V
Max. contact resistance	5 m?
Pollution degree	2
Overvoltage categorie	I

Material

Material group	II
Material of insert	PBT/PA
Material of housing	PA
Material of contact	CuSn (Bronze)
Plating	Au (Gold)