

Product data sheet

Binder connectoren


Female panel mount connector



With dip solder termination

99 9212 090 04

<https://www.ac-solutions.be/nl/product/99921209004>

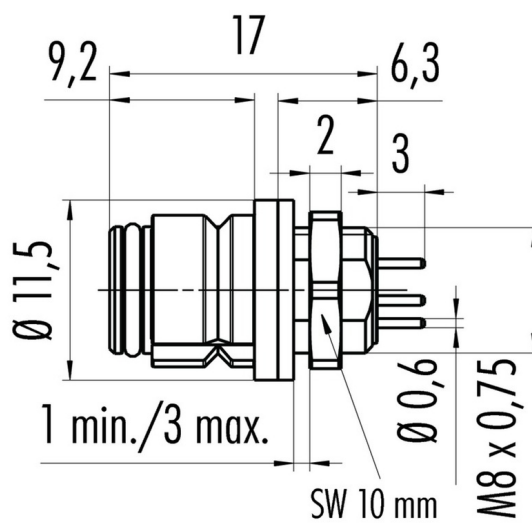

Specificaties

General Characteristics

Series	Subminiature
Subseries	620
Gender	Female
Number of contacts	4
Contact terminal	Dip solder
Upper temperature	+85 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking system	Snap-in
Mating cycles	>500
Connector Diameter	11.5 mm
Wire-section	0.25 mm ²

Electrical parameters

Nominal current	2.5 A
-----------------	-------

Product data sheet

Binder connectoren

Female panel mount connector



Nominal voltage	125 V
Impuls voltage	1500 V
Max. contact resistance	3 m?
Pollution degree	2
Overvoltage categorie	II

Material

Material group	II
Material of insert	PA (UL 94 V-0)
Material of housing	PA (UL 94 V-0)
Material of contact	CuSn (Bronze)
Plating	Au (Gold)