

Product data sheet

Hummel connectoren


Crimp insert, 4+PE



Sockets, K-coding

A712-7.K03.941.102

<https://www.ac-solutions.be/nl/product/a7127k03941102>

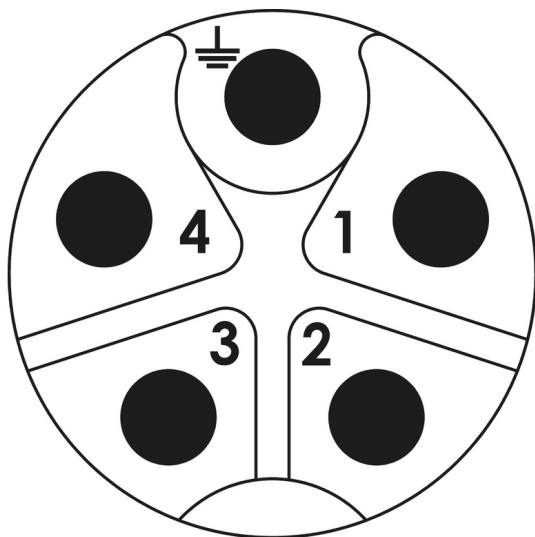

Specificaties

General Characteristics

Size	M12 Power
Number of contacts	5
Gender	Female
Upper temperature	+125 °C
Lower temperature	-40 °C
Locking	Screw locking
Protection degree	IP67/IP69K
Mating cycles	>100
Wire section	0,75-2,5 mm²
Terminal type	Crimp
Required crimp contacts	4xsocket & 1xpin
Contact diameter	1.5 mm
Remark	Socket inserts mountable with female thread housings only

Electrical Parameters

Product data sheet

Hummel connectoren

Crimp insert, 4+PE



Nominal voltage (degree of pollution 3) (a)	630 V~
Test voltage (a)	3310 V~
Nominal current (a)	16 A
Insulation resistance	$> 10^2$
Max. contact resistance (a)	3 m Ω

Material

Material	Brass/Die Cast
Plating	Nickel plated