


Panel connector male thread, single hole front mounted



K,L Coding, with lock nut "rotation protection"

A712-7.K42.000.00G

<https://www.ac-solutions.be/nl/product/a7127k4200000g>

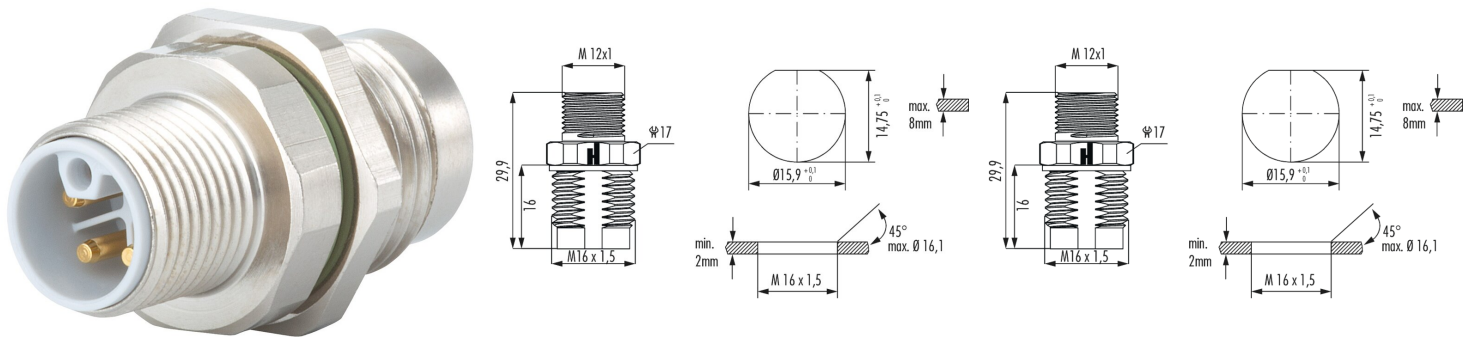

Specificaties

General Characteristics

Size	M12 Power
Gender of required insert	Male
Upper temperature	125 °C
Lower temperature	-40 °C
Connector locking system	Screw
Protection degree	IP67/IP69K
Mating cycles	>100
Thread	M16

Material

Housing material	Brass/Die Cast
Housing plating	Nickel plated