

# Product data sheet


## Ilme connectoren

bulkhead mounting housing, size 104.27, E-Xtreme alu, 2 levers



C7IE 24

<https://www.ac-solutions.be/nl/product/c7ie24>

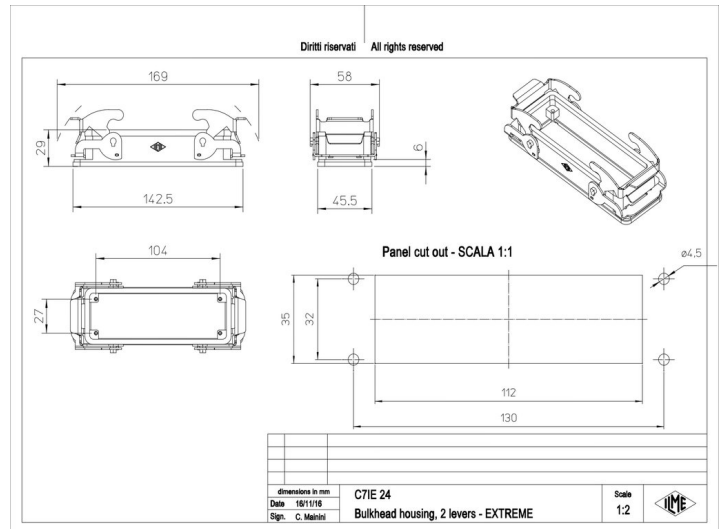

## Specificaties

### General characteristics

|                             |                                                                 |
|-----------------------------|-----------------------------------------------------------------|
| Enclosure type              | Bulkhead mounting housing                                       |
| Size                        | 104.27                                                          |
| Enclosure series            | E-Xtreme® V-TYPE                                                |
| Closing type                | With 2 levers                                                   |
| Locking mechanism           | Double locking levers                                           |
| Protection degree           | IP66 / IP67 / IP69                                              |
| Operation lower temperature | -40 °C                                                          |
| Operation upper temperature | 125 °C                                                          |
| Cable entry type            | without cable entry                                             |
| Position cable feed         | Without cable entry                                             |
| Height                      | 29 mm                                                           |
| Width                       | 45.5 mm                                                         |
| Length                      | 142.5 mm                                                        |
| Remark                      | FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C) |

### Material

|                  |                                                   |
|------------------|---------------------------------------------------|
| Material housing | Die cast aluminium alloy                          |
| Coating housing  | With epoxy-polyester thermosetting powder coating |

# Product data sheet

## Ilme connectoren

bulkhead mounting housing, size 104.27, E-Xtreme alu, 2 levers



Inflammability class of insulation material acc. with UL94

V2