

# Product data sheet

## Ilme connectoren

hood, high, size 66.40, C-TYPE alu, 4 pegs, 1xPG21 side




CAO 50.21


<https://www.ac-solutions.be/nl/product/cao5021>



CHO (CAO) CAV - MHO (MAO/MFO/MFV) MAV

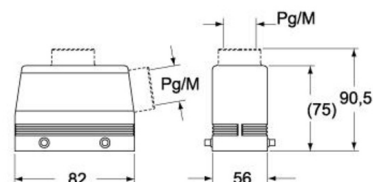

CAV G - MAV G (MFV G)

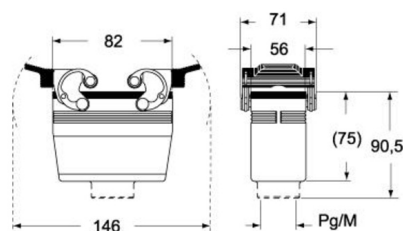

## Specificaties

### General characteristics

|                             |                               |
|-----------------------------|-------------------------------|
| Enclosure type              | Hood                          |
| Size                        | 66.40                         |
| Enclosure series            | C-TYPE                        |
| Closing type                | With 4 pegs                   |
| Locking mechanism           | Double locking levers         |
| Protection degree           | IP65 / IP66 / IP69            |
| Ambient lower temperature   | -40 °C                        |
| Ambient upper temperature   | 125 °C                        |
| Operation lower temperature | -40 °C                        |
| Operation upper temperature | 125 °C                        |
| Cable entry type            | side cable entry with adapter |
| Cable entry size            | Pg21                          |
| Position cable feed         | Side entry                    |
| Height                      | 75 mm                         |
| Width                       | 56 mm                         |
| Length                      | 82 mm                         |

## Material

# Product data sheet

## Ilme connectoren

hood, high, size 66.40, C-TYPE alu, 4 pegs, 1xPG21 side



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |