

Product data sheet


Ilme connectoren

surface mounting housing, high, size 104.27, C-TYPE alu, 1 lever, 1xPG29 side, cov.



CAP 24 LS29

<https://www.ac-solutions.be/nl/product/cap24ls29>

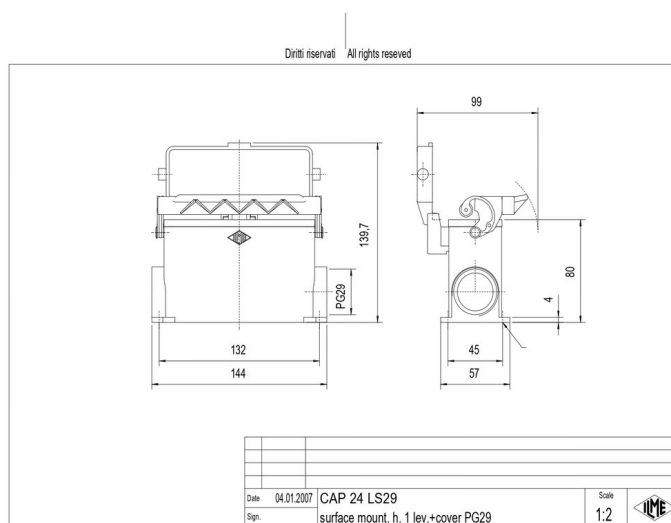

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	104.27
Enclosure series	C-TYPE
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP65
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	Pg29
Position cable feed	Side entry
Height	81 mm
Width	57 mm
Length	144 mm

Material

Product data sheet

Ilme connectoren

surface mounting housing, high, size 104.27, C-TYPE alu, 1 lever, 1xPG29 side, cov.



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With hinged lid,With interlocking device