

Product data sheet

Ilme connectoren

hood, high, size 104.27, C-TYPE alu, 2 pegs, 1xPG29 top




CAV 24 L29


<https://www.ac-solutions.be/nl/product/cav24l29>



CHO L (CAO L) - MHO L (MAO L)
CHV L (CAV L) - MHV L (MAV L)

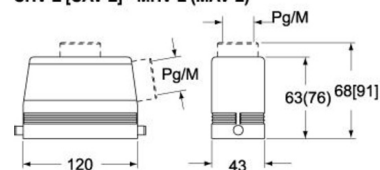

CHV LG (CAV LG), MHV LG (MAV LG) [MFV LG]

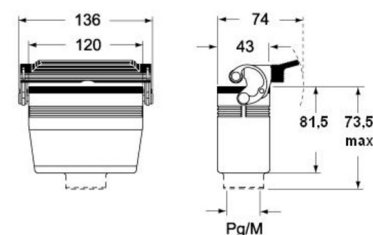

Specificaties

General characteristics

Enclosure type	Hood
Size	104.27
Enclosure series	C-TYPE
Closing type	With 2 pegs
Locking mechanism	Single locking lever
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	top cable entry
Cable entry size	Pg29
Position cable feed	Top entry
Height	91 mm
Width	43 mm
Length	120 mm

Material

Product data sheet

Ilme connectoren

hood, high, size 104.27, C-TYPE alu, 2 pegs, 1xPG29 top



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device