

Product data sheet



Ilme connectoren - CDD 144 P + PE

male insert, 72p+PE, crimp, 10A, 250V, for size 77.62 no.73-144



CDDM 72 N

<https://www.ac-solutions.be/nl/product/cddm72n>

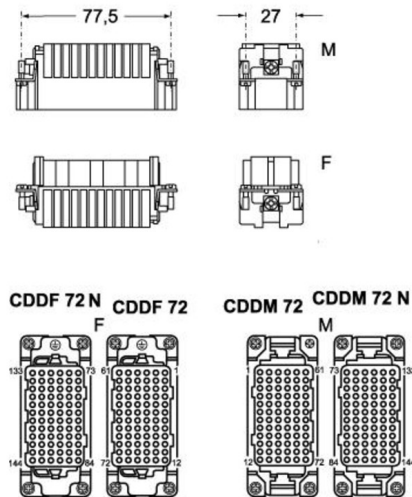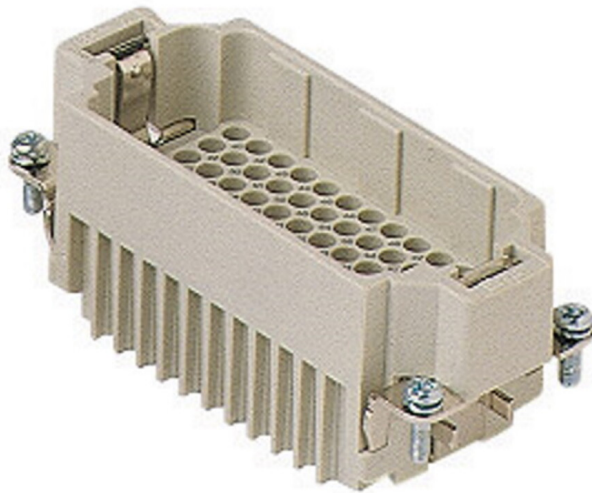

Specificaties

General characteristics

Product Type	Standard insert
Insert series	CDD
Number of contacts	144 + PE (73-144)
Number of poles	144
Connection type	Crimp connection
Gender	Male
Size	77.62
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Diameter male contact	1.6 mm
Pin numbers	73-144
Colour	Grey
Extra information	Contact insert without contacts

Product data sheet

Ilme connectoren - CDD 144 P + PE

male insert, 72p+PE, crimp, 10A, 250V, for size 77.62 no.73-144



Remark	To be ordered with CDDM 72
--------	----------------------------

Electrical parameters

Max. rated current	10 A
Nominal rated voltage	250 V
Over voltage category	III
Rated surge voltage	4 kV
Pollution degree	2

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0