
# Product data sheet


## ILME connectoren

### hood, size 44.27, C-TYPE alu, 1 lever, 1xPG16 top

CHV 06 LG
https://www.ac-solutions.be/nl/product/chv06lg



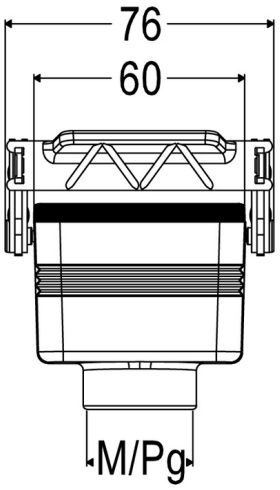

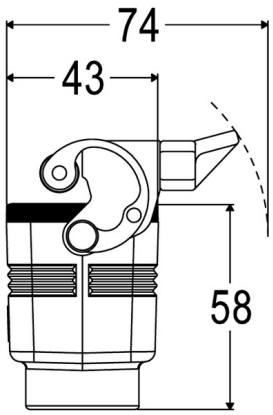
## Specificaties

### General characteristics

| | |
|---|---|
| **Enclosure type** | Hood |
| **Size** | 44.27 |
| **Enclosure series** | C-TYPE |
| **Closing type** | With 1 lever |
| **Locking mechanism** | Single locking lever |
| **Protection degree** | IP65 / IP66 / IP69 |
| **Ambient lower temperature** | -40 °C |
| **Ambient upper temperature** | 125 °C |
| **Operation lower temperature** | -40 °C |
| **Operation upper temperature** | 125 °C |
| **Cable entry type** | top cable entry |
| **Cable entry size** | Pg16 |
| **Position cable feed** | Top entry |
| **Height** | 58.5 mm |
| **Width** | 43 mm |
| **Length** | 76 mm |

### Material

# Product data sheet

## ILME connectoren

### hood, size 44.27, C-TYPE alu, 1 lever, 1xPG16 top

| | |
|---|---|
| **Material housing** | Die cast aluminium alloy |
| **Coating housing** | With epoxy-polyester thermosetting powder coating |
| **Inflammability class of insulation material acc. with UL94** | V2 |
| **Extra information** | Corrosion resistant,UV resistant,With interlocking device |