

# Product data sheet

## Ilme connectoren

hood, size 77.62, C-TYPE alu, 1 lever, 1xPG36 top




CHV 32 LG


<https://www.ac-solutions.be/nl/product/chv32lg>



CHO L - CHV L MHO/MFO/MFV L - MHV L

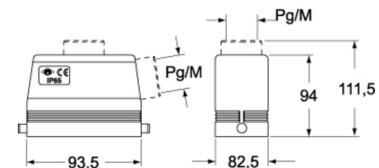

CHV LG - MHV LG - MFV LG

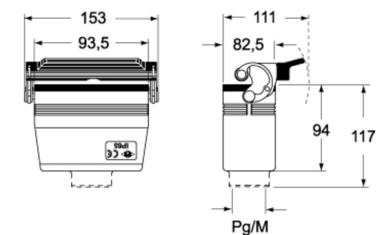

## Specificaties

### General characteristics

|                             |                              |
|-----------------------------|------------------------------|
| Enclosure type              | Hood                         |
| Size                        | 77.62                        |
| Enclosure series            | C-TYPE                       |
| Closing type                | With 1 lever                 |
| Locking mechanism           | Single locking lever         |
| Protection degree           | IP65 / IP66 / IP69           |
| Ambient lower temperature   | -40 °C                       |
| Ambient upper temperature   | 125 °C                       |
| Operation lower temperature | -40 °C                       |
| Operation upper temperature | 125 °C                       |
| Cable entry type            | top cable entry with adapter |
| Cable entry size            | Pg36                         |
| Position cable feed         | Top entry                    |
| Height                      | 112.5 mm                     |
| Width                       | 82.5 mm                      |
| Length                      | 153 mm                       |

## Material

# Product data sheet

## Ilme connectoren

hood, size 77.62, C-TYPE alu, 1 lever, 1xPG36 top



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |