

Product data sheet



Ilme connectoren - CK 4 P + PE

female insert, size 21.21, 4p+PE, gold, screw, 10A, 230/400V



CKFD 04

<https://www.ac-solutions.be/nl/product/ckfd04>

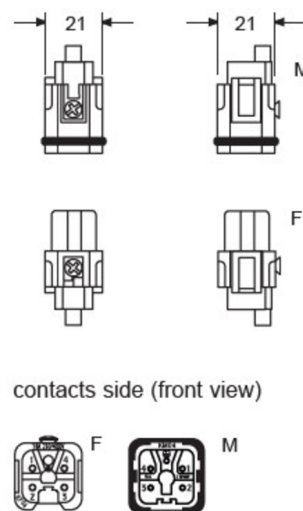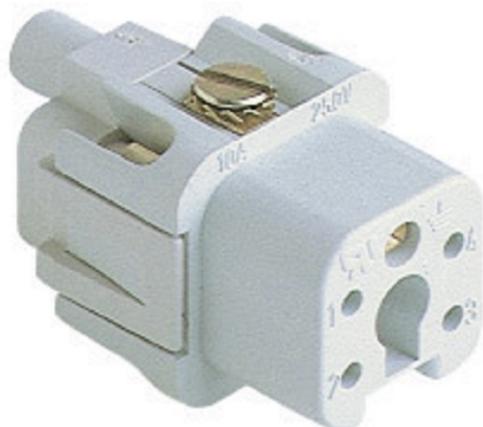

contacts side (front view)

Specificaties

General characteristics

Product Type	Standard insert
Insert series	CK
Number of contacts	4 + PE
Number of poles	4
Connection type	Screw terminal connection
Gender	Female
Size	21.21
Operation lower temperature	-40 °C
Operation upper temperature	100 °C
AWG-range 1	18
AWG-range 2	14
Min. Cross section with end sleeve	0.75 mm ²
Max. Cross section with end sleeve	2.5 mm ²
Min. Cross section	0.75 mm ²
Max. Cross section	2.5 mm ²
Colour	White
Extra information	With protective conductor

Product data sheet

Ilme connectoren - CK 4 P + PE

female insert, size 21.21, 4p+PE, gold, screw, 10A, 230/400V



Remark	The female inserts can be mounted into the straight bulkhead housings CK I from the rear
--------	--

Electrical parameters

Max. rated current	10 A
Nominal rated voltage	230/400 V
Over voltage category	III
Rated surge voltage	4 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Gold
Inflammability class of insulation material acc. with UL94	V1