



Product data sheet

Ilme connectoren - CME 10 P + 2 P + PE
female insert, size 104.27, 10+2p+PE, screw, 16A, 830V



CMEF 10 TX

<https://www.ac-solutions.be/nl/product/cmef10tx>

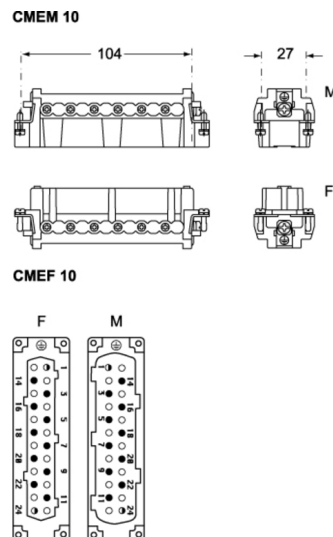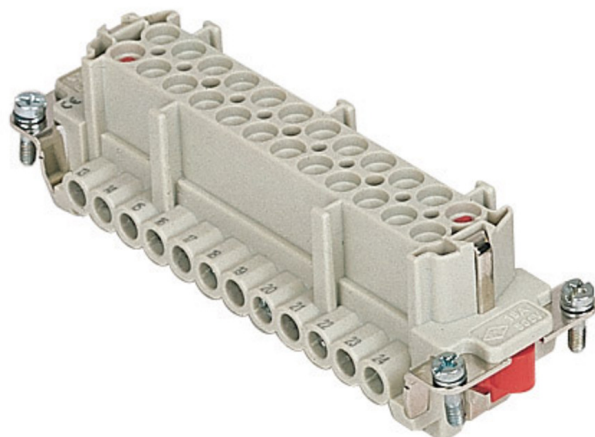

Specificaties

General characteristics

Product Type	Standard insert
Insert series	CME
Number of contacts	10 + 2 + PE
Number of poles	10 + 2 + PE
Connection type	Screw terminal connection
Gender	Female
Size	104.27
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	24
AWG-range 2	14
Min. Cross section	0.25 mm ²
Max. Cross section	2.5 mm ²
Colour	Grey

Electrical parameters

Max. rated current	16 A
Nominal rated voltage	830 V

Product data sheet

Ilme connectoren - CME 10 P + 2 P + PE
female insert, size 104.27, 10+2p+PE, screw, 16A, 830V



Rated surge voltage	8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0