

Product data sheet



Ilme connectoren - CNE RYN 24 P + PE

female insert, 24p+PE, silver, screw, 16A, 500V, for size 104.62 no.25-48, 180°C



CNEF 24 RYN

<https://www.ac-solutions.be/nl/product/cnef24ryn>

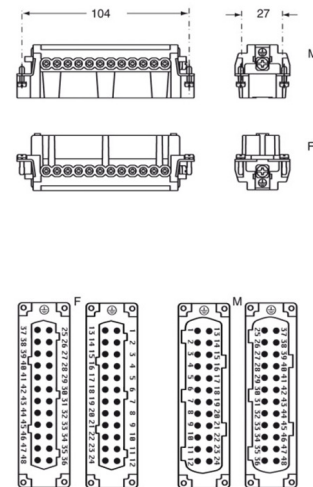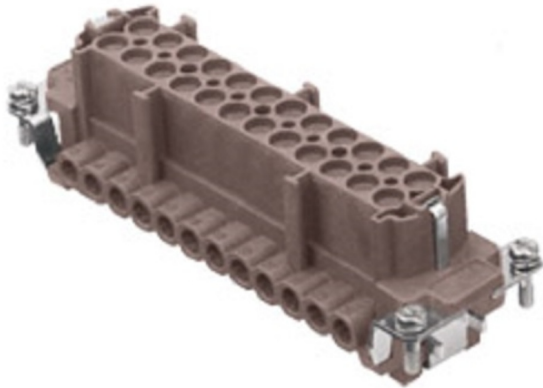

Specificaties

General characteristics

Product Type	Standard insert
Insert series	CNE RYN
Number of contacts	48 + PE (25-48)
Number of poles	48
Connection type	Screw terminal connection
Gender	Female
Size	104.62
Operation lower temperature	-40 °C
Operation upper temperature	180 °C
AWG-range 1	20
AWG-range 2	12
Min. Cross section without end sleeve	0.5 mm ²
Max. Cross section without end sleeve	4 mm ²
Min. Cross section	0.5 mm ²
Max. Cross section	4 mm ²
Pin numbers	25-48
Colour	Brown

Product data sheet

Ilme connectoren - CNE RYN 24 P + PE

female insert, 24p+PE, silver, screw, 16A, 500V, for size 104.62 no.25-48, 180°C



Extra information	With protective conductor,With wire protection
Remark	To be ordered with CNEF 24 RY

Electrical parameters

Max. rated current	16 A
Nominal rated voltage	500 V
Over voltage category	III
Rated surge voltage	6 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0