

# Product data sheet



## Ilme connectoren - CTSE 24 P + PE

female insert, size 104.27, 24p+PE, silver, spring, 16A, 500V, left



CTSEF 24 L

<https://www.ac-solutions.be/nl/product/ctsef24l>

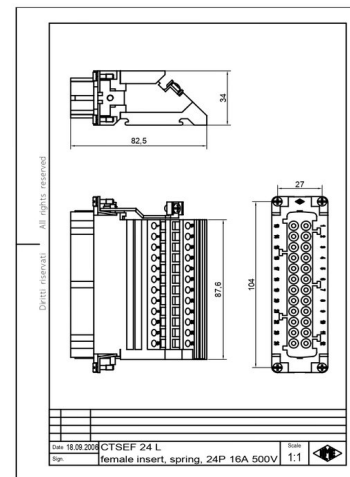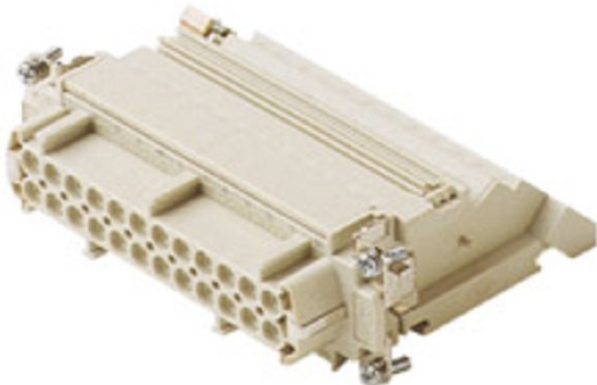

## Specificaties

### General characteristics

|                                       |                                                                |
|---------------------------------------|----------------------------------------------------------------|
| Product Type                          | Standard insert                                                |
| Insert series                         | CTSE                                                           |
| Number of contacts                    | 24 + PE                                                        |
| Number of poles                       | 24                                                             |
| Connection type                       | Spring terminal connection                                     |
| Gender                                | Female                                                         |
| Size                                  | 104.27                                                         |
| Operation lower temperature           | -40 °C                                                         |
| Operation upper temperature           | 125 °C                                                         |
| AWG-range 1                           | 26                                                             |
| AWG-range 2                           | 14                                                             |
| Min. Cross section without end sleeve | 0.75 mm <sup>2</sup>                                           |
| Max. Cross section without end sleeve | 2.5 mm <sup>2</sup>                                            |
| Min. Cross section                    | 0.14 mm <sup>2</sup>                                           |
| Max. Cross section                    | 2.5 mm <sup>2</sup>                                            |
| Colour                                | Grey                                                           |
| Extra information                     | Modular version,With protective conductor,With wire protection |

# Product data sheet

## Ilme connectoren - CTSE 24 P + PE

female insert, size 104.27, 24p+PE, silver, spring, 16A, 500V, left



|        |                                                  |
|--------|--------------------------------------------------|
| Remark | Only for bulkhead mounted housings and BIG hoods |
|--------|--------------------------------------------------|

### Electrical parameters

|                       |       |
|-----------------------|-------|
| Max. rated current    | 16 A  |
| Nominal rated voltage | 500 V |
| Over voltage category | III   |
| Rated surge voltage   | 6 kV  |
| Pollution degree      | 3     |

### Material

|                                                            |               |
|------------------------------------------------------------|---------------|
| Material insert                                            | Thermoplastic |
| Material contact                                           | Copper alloy  |
| Plating of contact                                         | Silver        |
| Inflammability class of insulation material acc. with UL94 | V0            |