

Product data sheet


Ilme connectoren

male insert, MIXO, 2MU, 1PE, screw, 300A



CX 01 30PEAM

<https://www.ac-solutions.be/nl/product/cx0130peam>

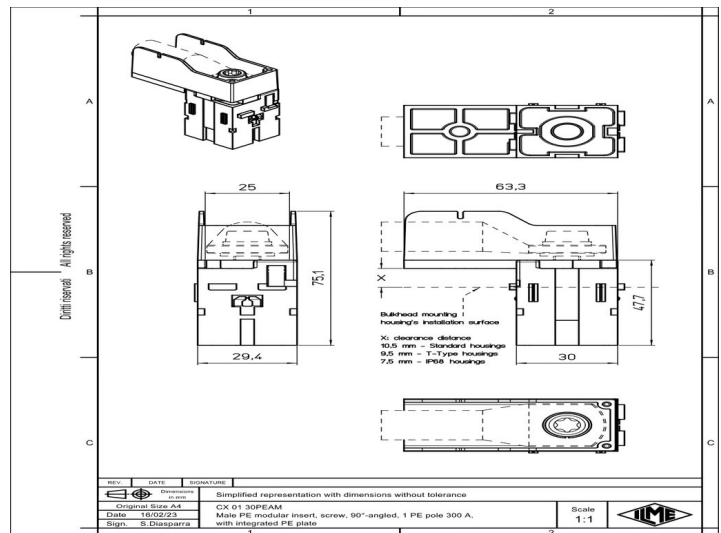

Specificaties

General characteristics

Product type	Modular insert
Insert series	Mixo
Number of contacts	1 PE
Connection type	Screw terminal connection
Gender	Female
Number of module slots	2
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	6
AWG-range 2	4/0
Min. Cross section	16 mm ²
Max. Cross section	120 mm ²
Colour	Grey

Electrical parameters

Max. rated current	300 A
Rated surge voltage	8 kV
Pollution degree	3

Product data sheet

Ilme connectoren

male insert, MIXO, 2MU, 1PE, screw, 300A



Material

Material insert	Polycarbonate (PC)
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0