

# Product data sheet



## Ilme connectoren

female insert, MIXO, 1MU, 8 - RJ45, 1A, 50V, RJ45



CX 01 J8F

<https://www.ac-solutions.be/nl/product/cx01j8f>

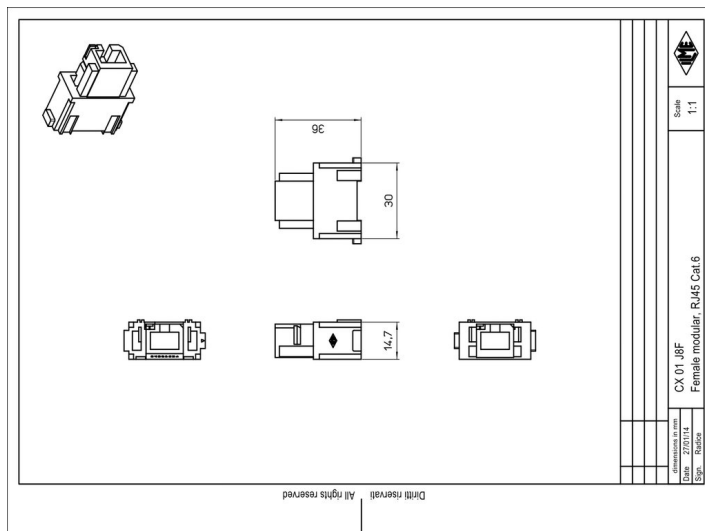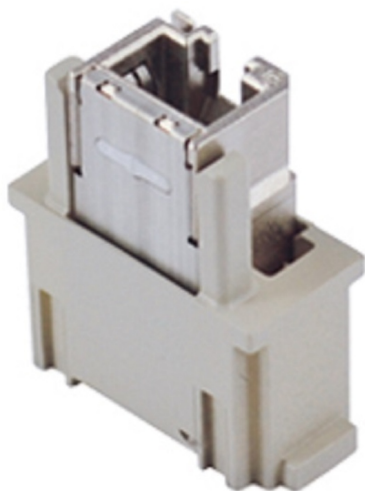

## Specificaties

### General characteristics

|                                       |                                                         |
|---------------------------------------|---------------------------------------------------------|
| Product type                          | Modular insert                                          |
| Insert series                         | Mixo Data                                               |
| Number of contacts                    | 8 - RJ45                                                |
| Connection type                       | RJ45                                                    |
| Gender                                | Female                                                  |
| Number of module slots                | 1                                                       |
| Operation lower temperature           | -40 °C                                                  |
| Operation upper temperature           | 70 °C                                                   |
| Min. Cross section without end sleeve | 0.4 mm <sup>2</sup>                                     |
| Max. Cross section without end sleeve | 0.51 mm <sup>2</sup>                                    |
| Colour                                | Grey                                                    |
| Extra information                     | With wire protection                                    |
| Remark                                | To be used on high enclosures or bulkhead housings only |

### Electrical parameters

|                       |      |
|-----------------------|------|
| Max. rated current    | 1 A  |
| Nominal rated voltage | 50 V |
| Over voltage category | III  |

# Product data sheet

## Ilme connectoren

female insert, MIXO, 1MU, 8 - RJ45, 1A, 50V, RJ45



|                     |        |
|---------------------|--------|
| Rated surge voltage | 0.8 kV |
| Pollution degree    | 3      |

## Material

|                                                            |               |
|------------------------------------------------------------|---------------|
| Material insert                                            | Thermoplastic |
| Inflammability class of insulation material acc. with UL94 | V0            |