

Product data sheet


Ilme connectoren

female insert, MIXO, 1MU, 12p, AXYR® push-in connection, 10A, 250V



CX 12 DYF

<https://www.ac-solutions.be/nl/product/cx12dyf>

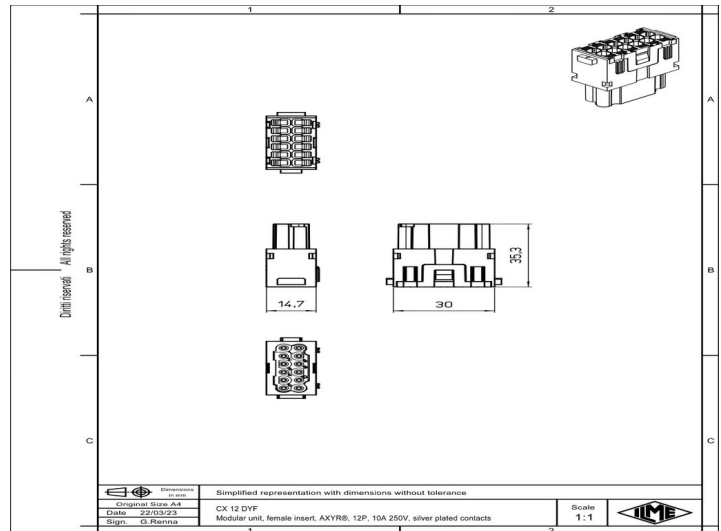

Specificaties

General characteristics

Product type	Modular insert
Insert series	Mixo
Number of contacts	12
Connection type	AXYR® high density spring terminal connection without tools
Gender	Female
Number of module slots	1
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	14
Min. Cross section	0.14 mm ²
Max. Cross section	2.5 mm ²
Colour	Grey

Electrical parameters

Max. rated current	10 A
Nominal rated voltage	250 V
Rated surge voltage	4 kV

Product data sheet

Ilme connectoren

female insert, MIXO, 1MU, 12p, AXYR® push-in connection, 10A, 250V



Pollution degree	3
------------------	---

Material

Material insert	Polycarbonate (PC)
Material contact	Copper alloy
Plating of contact	Silver
Inflammability class of insulation material acc. with UL94	V0