

Product data sheet


Ilme connectoren

male insert, MIXO, 1MU, 3+4p, crimp, 40+10A, 830V



CX 3/4 XDM

<https://www.ac-solutions.be/nl/product/cx34xdm>

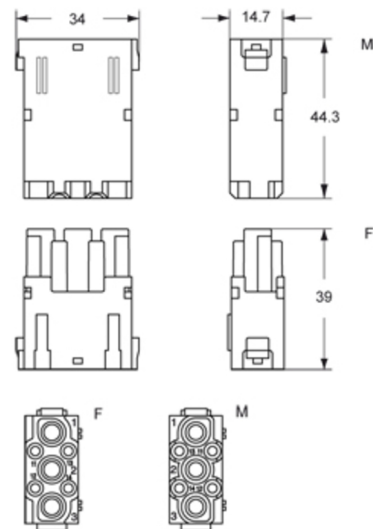

Specificaties

General characteristics

Product type	Modular insert
Insert series	Mixo
Number of contacts	3 + 4
Connection type	Crimp connection
Gender	Male
Number of module slots	1
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
AWG-range 1	26
AWG-range 2	10
Min. Cross section	0.14 mm ²
Max. Cross section	6 mm ²
Diameter male contact	3P: 4, 4P: 1,6 mm
Colour	Grey
Extra information	Contact insert without contacts

Electrical parameters

Max. rated current	40 A
--------------------	------

Product data sheet

Ilme connectoren

male insert, MIXO, 1MU, 3+4p, crimp, 40+10A, 830V



Nominal rated voltage	830 V
Over voltage category	IV
Rated surge voltage	8 kV
Pollution degree	3

Material

Material insert	Thermoplastic
Inflammability class of insulation material acc. with UL94	V0