

Product data sheet


Ilme connectoren

surface mounting housing, high, size 66.16, IL-BRID alu, 1 lever, 1xPG16 side, cov.



CZAP 25 LS

<https://www.ac-solutions.be/nl/product/czap25ls>

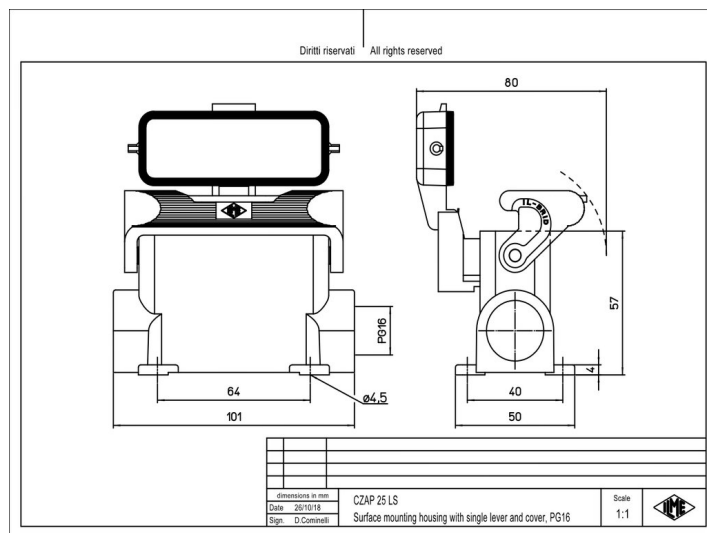

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	66.16
Enclosure series	IL-BRID
Closing type	With 1 lever
Locking mechanism	Single locking lever
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	Pg16
Position cable feed	Side entry
Height	57 mm
Width	50 mm
Length	101 mm

Material

Product data sheet

Ilme connectoren

surface mounting housing, high, size 66.16, IL-BRID alu, 1 lever, 1xPG16 side, cov.



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With hinged lid,With interlocking device