

Product data sheet

Higo connectoren - F618A


Male angled plug connector



Push-on flexible

F618AG A 00 GN 1000

<https://www.ac-solutions.be/nl/product/f618aga00gn1000>

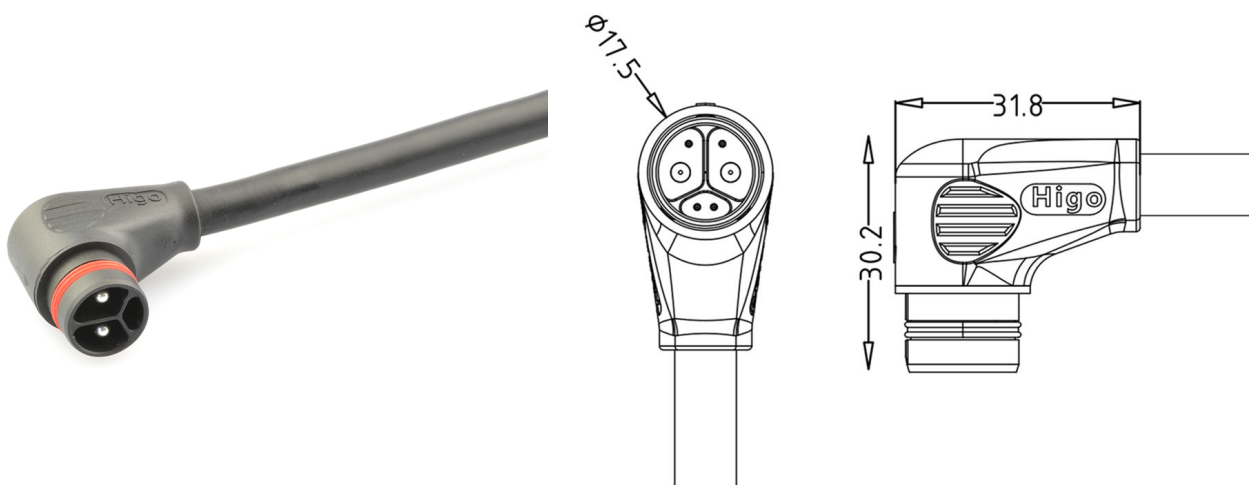

Specificaties

General Characteristics

Number of contacts	6 (2+4)
Connector shape	Angled plug
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Mating cycles (times)	3000 Times
Connector diameter	18 mm
Fitting length	20 mm
Cable Length	1000 mm
Cable diameter	8 mm
Wire section	2 x 3,3 + 4 x 0,2
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - F618A

Male angled plug connector



Electrical Parameters

Rated current	30 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Material jacket	PVC
Insulation wire	FEP
Material of contact	Copper alloy
Contact plating	Silver plated