

Product data sheet

Higo connectoren - F621A



Male panel mount connector



Push-on flexible

F621AG C 03 GA 0150

<https://www.ac-solutions.be/nl/product/f621agc03ga0150>

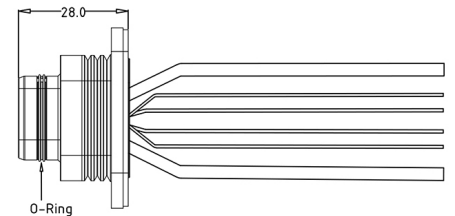

Specificaties

General Characteristics

Number of contacts	6 (2+4)
Connector shape	Panel mount
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Locking	Push-on flexible
Mating cycles (times)	3000 Times
Connector diameter	46,0 x 18,0 mm
Cable Length	150 mm
Wire section	2 x 3,3 + 4 x 0,2
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - F621A

Male panel mount connector



Electrical Parameters

Rated current	30 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Silver plated