

Product data sheet

Higo connectoren - Mini C



Mini C male panel mount connector



Screw Locking

L309CG C 03 00 0300

<https://www.ac-solutions.be/nl/product/l309cgc03000300>

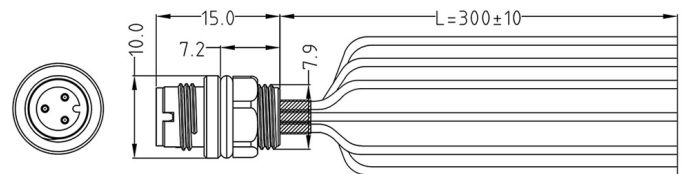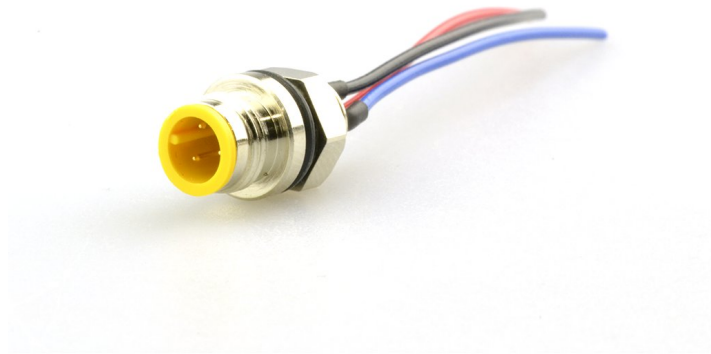

Specificaties

General Characteristics

Number of contacts	3
Connector shape	Panel mount
Gender	Male
Color	Yellow
Upper temperature	80 °C
Lower temperature	-25 °C
Protection degree	IP67
Mating cycles (times)	200 Times
Connector diameter	10 mm
Cable Length	300 mm
Wire section	3 x 0,34 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo connectoren - Mini C

Mini C male panel mount connector



Electrical Parameters

Rated current	2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M?)	?20 M?
Max. contact resistance (M?)	?10 m?

Material

Insulation wire	PVC
Material of contact	Phosphor Bronze
Contact plating	Gold over Nickel