

Product data sheet



Ilme connectoren

surface mounting housing, high, size 104.27, E-Xtreme alu, 2 levers, 2xM40 side



M7APE 24.240

<https://www.ac-solutions.be/nl/product/m7ape24240>

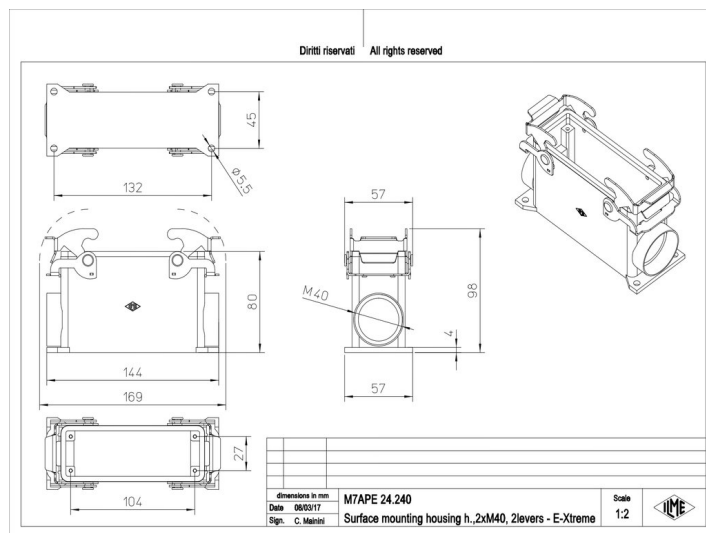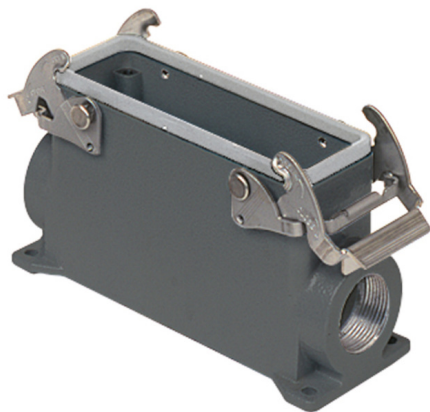

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	104.27
Enclosure series	E-Xtreme® V-TYPE
Closing type	With 2 levers
Locking mechanism	Double locking levers
Protection degree	IP66 / IP67 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M40 x 2
Position cable feed	Side entry
Height	80 mm
Width	57 mm
Length	144 mm
Remark	FKM gasket (-40°C...+180°C) or silicone gasket (-60°C...+180°C)

Product data sheet

Ilme connectoren

surface mounting housing, high, size 104.27, E-Xtreme alu, 2 levers, 2xM40 side



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2