

Product data sheet

Ilme connectoren

hood, high, size 104.27, C-TYPE alu, 2 pegs, 1xM40 side




MAO 24 L40


<https://www.ac-solutions.be/nl/product/mao24l40>



CHO L (CAO L) - MHO L (MAO L)
CHV L (CAV L) - MHV L (MAV L)

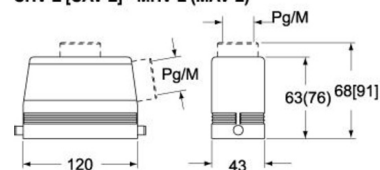

CHV LG (CAV LG), MHV LG (MAV LG) [MFV LG]

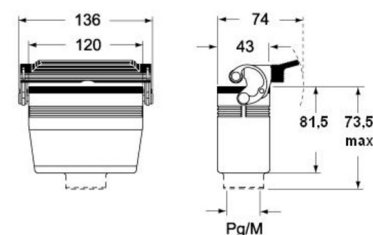

Specificaties

General characteristics

Enclosure type	Hood
Size	104.27
Enclosure series	C-TYPE
Closing type	With 2 pegs
Locking mechanism	Single locking lever
Protection degree	IP65 / IP66 / IP69
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M40
Position cable feed	Side entry
Height	76 mm
Width	43 mm
Length	120 mm

Material

Product data sheet

Ilme connectoren

hood, high, size 104.27, C-TYPE alu, 2 pegs, 1xM40 side



Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With interlocking device