

# Product data sheet


## Ilme connectoren

surface mounting housing, high, size 44.27, C-TYPE alu, 1 lever, 2xM40 side, cover metal



MAP 06 LS240

<https://www.ac-solutions.be/nl/product/map06ls240>

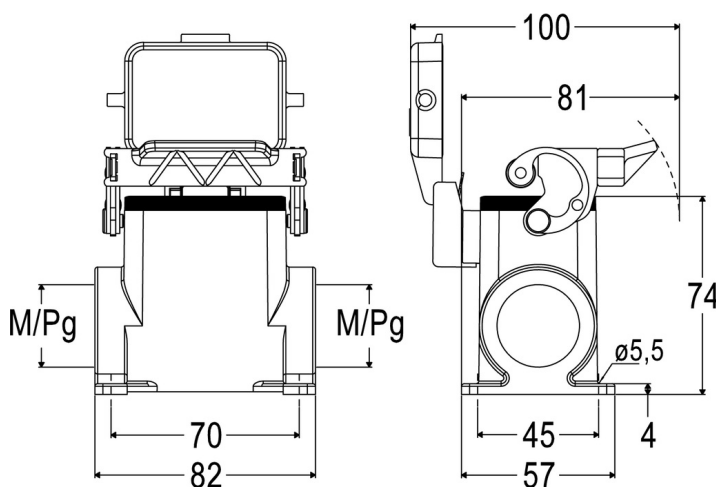

## Specificaties

### General characteristics

|                             |                          |
|-----------------------------|--------------------------|
| Enclosure type              | Surface mounting housing |
| Size                        | 44.27                    |
| Enclosure series            | C-TYPE                   |
| Closing type                | With 1 lever             |
| Locking mechanism           | Single locking lever     |
| Protection degree           | IP65                     |
| Ambient lower temperature   | -40 °C                   |
| Ambient upper temperature   | 125 °C                   |
| Operation lower temperature | -40 °C                   |
| Operation upper temperature | 125 °C                   |
| Cable entry type            | side cable entry         |
| Cable entry size            | M40 x 2                  |
| Position cable feed         | Two-sided                |
| Height                      | 74 mm                    |
| Width                       | 57 mm                    |
| Length                      | 82 mm                    |

## Material

# Product data sheet

## Ilme connectoren

surface mounting housing, high, size 44.27, C-TYPE alu, 1 lever, 2xM40 side, cover metal



|                                                            |                                                                           |
|------------------------------------------------------------|---------------------------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating                         |
| Inflammability class of insulation material acc. with UL94 | V2                                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With hinged lid,With interlocking device |