

Product data sheet


Ilme connectoren

surface mounting housing, high, size 57.27, C-TYPE alu, 4 pegs, 2xM40 side, cover plastic




MAP 10 CP240


<https://www.ac-solutions.be/nl/product/map10cp240>

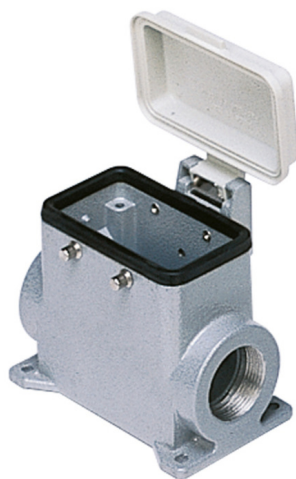

CHP CAP - MHP MAP



CHP CS/CP CAP CS/CP - MHP CS/CP MAP CS/CP



	A	B	C
CHP L / MHP L	57	40	52
CAP L / MAP L	73	45	57
CHP CS / MHP CS	57	40	52
CAP CS / MAP CS	73	45	57
CHP CP / MHP CP	57	40	52
CAP CP / MAP CP	73	45	57

Specificaties

General characteristics

Enclosure type	Surface mounting housing
Size	57.27
Enclosure series	C-TYPE
Closing type	With 4 pegs
Locking mechanism	Double locking levers
Protection degree	IP65
Ambient lower temperature	-40 °C
Ambient upper temperature	125 °C
Operation lower temperature	-40 °C
Operation upper temperature	125 °C
Cable entry type	side cable entry
Cable entry size	M40 x 2
Position cable feed	Two-sided
Height	74 mm
Width	57 mm
Length	93.5 mm
Remark	May be combined with enclosures: CHO 10 X,CAO 10 X,CHV 10 X,CAV 10 X,MHO 10 X,MAO 10 X,MHV 10 X,MAV 10 X

Product data sheet

Ilme connectoren

surface mounting housing, high, size 57.27, C-TYPE alu, 4 pegs, 2xM40 side, cover plastic



Material

Material housing	Die cast aluminium alloy
Coating housing	With epoxy-polyester thermosetting powder coating
Inflammability class of insulation material acc. with UL94	V2
Extra information	Corrosion resistant,UV resistant,With hinged lid,With interlocking device