

# Product data sheet

## Ilme connectoren

surface mounting housing, high, size 77.27, central lever alu, 2 pegs, 2xM32 side




MAP 16 YC232

<https://www.ac-solutions.be/nl/product/map16yc232>



CAP YC - MAP YC

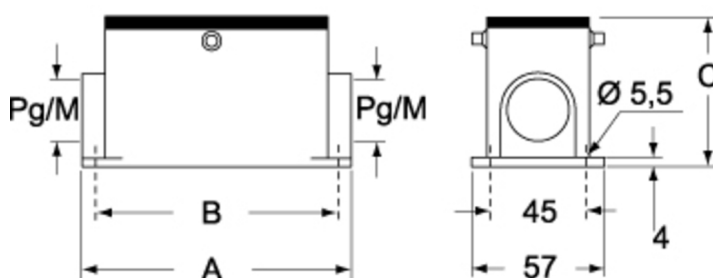

## Specificaties

### General characteristics

|                             |                          |
|-----------------------------|--------------------------|
| Enclosure type              | Surface mounting housing |
| Size                        | 77.27                    |
| Enclosure series            | CENTRAL LEVER            |
| Closing type                | With 2 pegs              |
| Locking mechanism           | Central lever            |
| Protection degree           | IP65 / IP66 / IP69       |
| Ambient lower temperature   | -40 °C                   |
| Ambient upper temperature   | 125 °C                   |
| Operation lower temperature | -40 °C                   |
| Operation upper temperature | 125 °C                   |
| Cable entry type            | side cable entry         |
| Cable entry size            | M32 x 2                  |
| Position cable feed         | Two-sided                |
| Height                      | 81 mm                    |
| Width                       | 57 mm                    |
| Length                      | 117 mm                   |

## Material

# Product data sheet

## Ilme connectoren

surface mounting housing, high, size 77.27, central lever alu, 2 pegs, 2xM32 side



|                                                            |                                                           |
|------------------------------------------------------------|-----------------------------------------------------------|
| Material housing                                           | Die cast aluminium alloy                                  |
| Coating housing                                            | With epoxy-polyester thermosetting powder coating         |
| Inflammability class of insulation material acc. with UL94 | V2                                                        |
| Extra information                                          | Corrosion resistant,UV resistant,With interlocking device |